

MV-HDDVR-4C

Empower 


4CH Tribrid 720P-Pro Mini 1U HD-over-coax DVR



Features

- Support HD-over-Coax/Analog/IP Video input
- H.264 dual-stream video compression
- All channel 720P realtime or 1080P non-realtime recording
- HDMI/VGA simultaneous video output
- 4 channel synchronous realtime playback, GRID interface & smart search
- Support Multi-brand network cameras: Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dahua, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videosec, Vivotek and etc.
- ONVIF Version 2.4 conformance
- Support 1 SATA HDD up to 6TB, 2 USB2.0
- 3D intelligent positioning
- Multiple network monitoring: Web viewer, Unisight VMS

System Connection

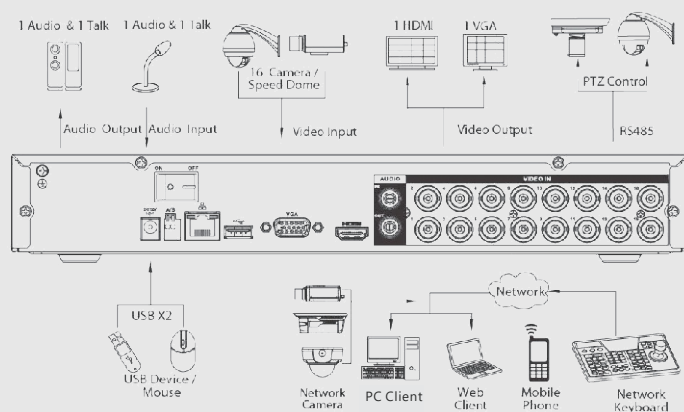

Technical Specifications

Model		PVR-P4-1VA
System		
Main Processor		Embedded processor
Operating System		Embedded LINUX
Video		
Input		4 channel, BNC
Standard	Analog	NTSC/PAL
	HDCVI	1080P/720P HDCVI Camera
	IP	Support 2ch 1080P/720P IP Camera
Audio		
Input		1 channel, RCA
Output		1 channel, RCA
Two-way Talk		Reuse audio input/output channel 1
Display		
Interface		1 HDMI, 1 VGA
Resolution		1920×1080, 1280×1024, 1280×720, 1024×768
Display Split		1/4
Privacy Masking		4 rectangular zones (each camera)
OSD		Camera title, Time, Video loss, Camera lock, Motion detection, Recording
Recording		
Video/Audio Compression		H.264/G.711
Record Rate	Main Stream:	1080P(1~15fps)/ 720P/960H/D1 (1~25/30fps)
	Extra Stream	CIF/QCIF(1~25/30fps)
Bit Rate		96~4096Kb/s
Record Mode		Manual, Schedule(Regular(Continuous), MD), Stop
Record Interval		1~60 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec
Video Detection & Alarm		
Trigger Events		Recording, PTZ, Tour, Alarm out, Video Push, Email, FTP, Snapshot, Buzzer & Screen tips
Video Detection		Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank
Playback & Backup		
Sync Playback		1/4
Search Mode		Time/Date, MD & Exact search (accurate to second)
Playback Functions		Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom
Backup Mode		USB Device/Internal SATA burner/Network
Network		
Ethernet		RJ-45 port (10/100M)
Network Functions		HTTP, IPv4/IPv6, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, SNMP, P2P
Max. User Access		128 users
Smart Phone		iPhone, iPad, Android, Windows Phone
Storage		
Internal HDD		1 SATA port, up to 6TB
Auxiliary Interface		
USB Interface		2 ports(1 Rear), USB2.0
RS485		1 port, For PTZ Control
General		
Power Supply		DC12V/2A
Power Consumption		10W(without HDD)
Working Environment		-10℃ ~+55℃ / 10%~90%RH / 86~106kpa
Dimension(W×D×H)		Mini 1U, 325mm×255mm×55mm
Weight		1.5KG(without HDD)