

GRIFFIN L200

VIEWPRO

MICROVIEW develops systems and strategies tailored to your security and surveillance needs. Perspective VMS is an optimized surveillance server with monitoring and orchestration capabilities which makes it the perfect addition to your physical security infrastructure, providing streamlined installation and efficiency in design.

GRIFFIN L200

An affordable dual-socket 2U rack appliance designed for enterprise deployments running on top of Microsoft Windows server.

This surveillance-optimized server comes preloaded with Lensec Perspective VMS various editions software and support for 200 cameras streaming and recording at high resolution. Cameras and security systems licenses are obtained separately.

Designed for Everyday Requirements

Griffin L200 fulfill the need for managing a higher number of cameras with storage scalability and high performance into a single appliance. Griffin L200 is the ideal appliance as central management server, central/ remote site NVR and standalone deployments.

Griffin L200 offers up to 14 x 3.5" hot plug hard drives with a total storage capacity of 224TB.

Windows operating system, VMS system and video data are protected from loss with RAID options to ensure critical functions high availability.

Centralized Security Monitoring and Control

Centralize monitoring of the security systems in your organization and automate workflow control of different systems based on pre-defined triggers and events.



High Performance

Griffin L200 accelerates your network surveillance infrastructure response with improved performance by using 24 cores, 2.2Ghz clock speed CPU from Intel Xeon Silver series processors. OS/VMS loaded on 2 SSD SATA sticks for faster booting and higher applications response time. It handles well the system management role with high response to users' requests, third-party security integration services and high video recording rates.

Plug and Play

With the pre-installed Perspective VMS engine, Griffin L200 can be easily inserted into an existing distributed Perspective VMS network to extend the existing physical security infrastructure with minimum administrator intervention.

High Availability

Griffin L200 is supplied with dual power supply and dual M.2 SSD sticks configured with RAID 1 for OS/VMS storage. Video data is also protected by RAID 5, 6, 50 and 60 options for higher data availability.

GRIFFIN L200

VIEWPRO

FEATURE	TECHNICAL SPECIFICATION
Form factor	2U
Dimensions	Form factor: Rack (2U) Width: 43.4cm (17.08 in) Depth: 69.4cm (27.31 in)
Processor	2 x Intel® Xeon Silver 4214 2.2Ghz, 12C/24T
Operating system	Microsoft Windows Server® 2019
Memory	2 x16GB RDIMM, 2666MT/s
VMS/OS Disk	2 x 240GB M.2 SSD SATA, Raid 1
Storage Bays	Up to 14 x 3.5 hot-plug
Storage Capacity	Up to 224TB
RAID Controller	Levels: 0, 1, 5, 6 Spans: 10, 50, 60
Power supplies	Dual Hot Plug 750W Power Supply Power Cord: C13 to C14, PDU Style, 10 AMP, 6.5 Feet (2m)
I/O and Ports	Networking: 2 x 1Gbe ports Rear ports: 2 x USB 3.0, VGA, serial connector 2 x 10Gbe BaseT ports Front ports: 2 x USB 2.0, VGA, 1 x micro USB 2.0 management Optional: 2 x 10Gbe SFP+ ports
Temperature	Storage: -40°C -65°C (-40°F-149°F) Standard Operation: 10°C -35°C (50°F -95°F) Expanded Operation: -5°C -45°C (23°F -113°F)
Humidity	Storage: 5% to 95% RH Operating: 10% to 80% RH
Altitude	Operating: 3,048m (10,000ft) Storage: 12,000m (39,370ft)
No. Cameras	Validated 200 cameras @3MP @25 FPS recording and streaming with full system features.
Remote Users	No license limitation
VMS Edition Support	LENSEC Standard, Professional, Enterprise
Video Wall Connectivity	Server/NVR Mode; Standalone/Centralized/Distributed;
Operation Mode	No
Support and Warranty	3 years

GRIFFIN L200

VIEWPRO

Chassis Views

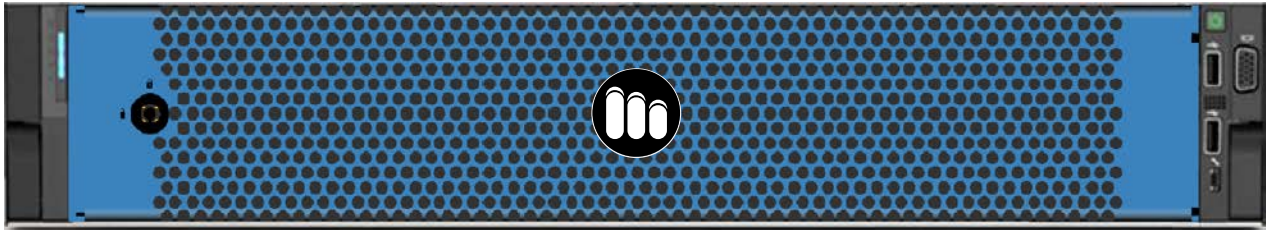


Figure 1. Front view

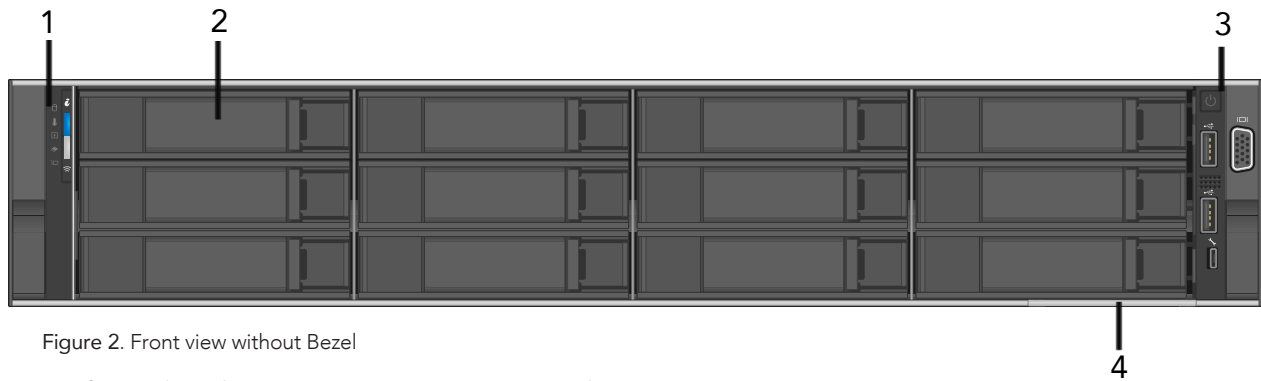


Figure 2. Front view without Bezel

- 1. Left control panel
- 2. Drive slot
- 3. Right control panel
- 4. Information tag

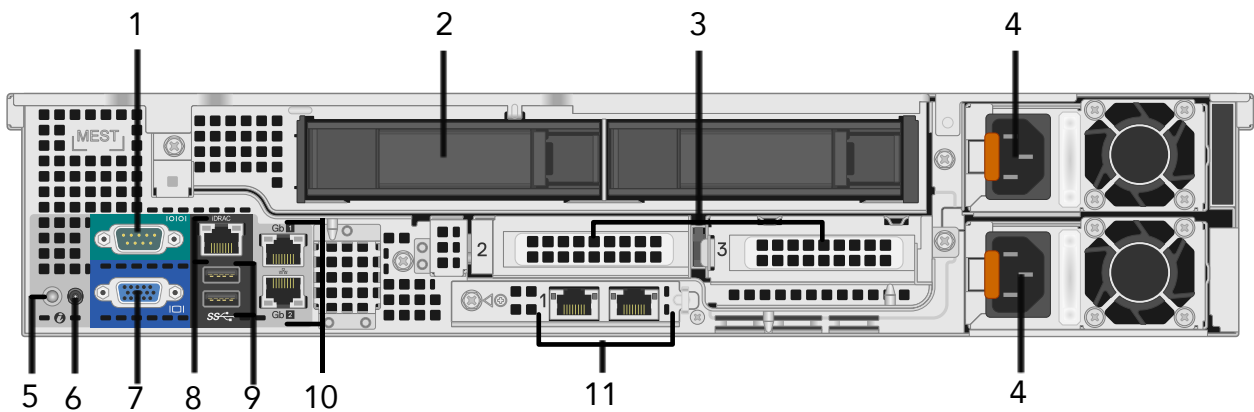


Figure 3. Rear view

- 1. Serial port
- 2. Drive slot
- 3. Low profile riser slot
- 4. Power supply unit
- 5. System identification button
- 6. CMA power port
- 7. VGA ports
- 8. Out of Band management port (OOB)
- 9. USB 3.0 ports
- 10. Gigabit Ethernet ports
- 11. 10 Gbe BaseT ports

